Skip to main content Skip to primary navigation	
Menu	
<ul> <li><u>Home Home</u></li> <li><u>About this portal</u></li> <li><u>Latest updates</u></li> </ul>	
Print Save Email	
Resource detail	
Citations	

# AS 3730.9-2006 (R2016) Guide to the properties of paints for buildings. Part 9: Latex - Exterior - Semi-gloss

View on Information Provider website {{ linkText }}
Abbreviation
AS 3730.9-2006 (R2016)
Valid from
07/04/2006
Information provider
SAI Global
Author
Standards Australia

Standards Australia Information type Australian Standard Format PDF

Cited By <u>This resource is cited by 8 documents (show Citations)</u> Cites

This resource cites 33 documents (show Citations)

#### Description

This Standard provides a guide to the features and typical characteristics that are expected of a latex semi-gloss finish for primarily exterior use applied by brush, roller or spray in accordance with the manufacturers instructions. Products covered by this guide are classified as paint Type B8 of AS/NZS 2311.

For assistance with locating previous versions, please contact the information provider.

View on Information Provider website {{ linkText }}

For assistance with locating previous versions, please contact the information provider.

This resource is cited by:

## AS 3730.9-2006 (R2016) Guide to the properties of paints for buildings. Part 9: Latex - Exterior - Semi-gloss

This document is CITED BY:

• E2/AS1 (Third Edition, Amendment 5, Errata 2)

AS 3730.9-2006 (R2016) is cited by Acceptable Solution E2/AS1: External Moisture from 01/08/2011

• E2/AS1 (Third Edition, Amendment 9)

AS 3730.9-2006 (R2016) is cited by Acceptable Solution E2/AS1: External Moisture from 01/08/2011

• E2/AS1 (Third Edition, Amendment 7)

AS 3730.9-2006 (R2016) is cited by Acceptable Solution E2/AS1: External Moisture from 01/08/2011

• E2/AS1 (Third Edition, Amendment 5)

AS 3730.9-2006 (R2016) is cited by Acceptable Solution E2/AS1: External Moisture from 01/08/2011

• E2/AS1 (Third Edition, Amendment 6)

AS 3730.9-2006 (R2016) is cited by Acceptable Solution E2/AS1: External Moisture from 01/08/2011

• E2/AS1 (Third Edition, Amendment 8)

AS 3730.9-2006 (R2016) is cited by Acceptable Solution E2/AS1: External Moisture from 01/08/2011

<u>NASH Building Envelope Solutions: 2019</u>

AS 3730.9-2006 (R2016) is cited by NASH Building Envelope Solutions: 2019 - Light Steel Framed Buildings.

• <u>NZS 4251.1:2007</u>

AS 3730.9-2006 (R2016) is cited by NZS 4251.1:2007 Solid plastering - Cement plaster for walls, ceilings and soffits

Back

## AS 3730.9-2006 (R2016) Guide to the properties of paints for buildings. Part 9: Latex - Exterior - Semi-gloss

Show what documents this resource is CITED BY Show what documents this resource CITES

#### Description

This Standard provides a guide to the features and typical characteristics that are expected of a latex semi-gloss finish for primarily exterior use applied by brush, roller or spray in accordance with the manufacturers instructions. Products covered by this guide are classified as paint Type B8 of AS/NZS 2311.

View on Information Provider website

AS 3730.9-2006 (R2016) Guide to the properties of paints for buildings. Part 9: Latex - Exterior - Semi-gloss

#### Description

This Standard provides a guide to the features and typical characteristics that are expected of a latex semi-gloss finish for primarily exterior use applied by brush, roller or spray in accordance with the manufacturers instructions. Products covered by this guide are classified as paint Type B8 of AS/NZS 2311.

View on Information Provider website

This resource cites:

# AS 3730.9-2006 (R2016) Guide to the properties of paints for buildings. Part 9: Latex - Exterior - Semi-gloss

This document CITES:

## • AS/NZS 1580.101.1:1999 (R2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.101.1:1999 (R2013) Paints and related materials - Methods of test - Method 101.1: Conditions of test - Temperature, humidity and airflow control

#### • <u>AS/NZS 1580.101.5:1999 (R2013)</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.101.5:1999 (R2013) Paints and related materials - Methods of test - Method 101.5: Conditions of test - Temperature and humidity control

## • AS/NZS 1580.103.1:1995 (R2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.103.1:1995 (R2013) Paints and related materials - Methods of test - Examination and preparation of samples for testing

## • AS/NZS 1580.104.1:2000 (R2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.104.1:2000 (R2013) Paints and related materials - Methods of test - Method 104.1: Recommended materials for test panels

#### • <u>AS/NZS 1580.204.1:1998 (R2013)</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.204.1:1998 (R2013) Paints and related materials - Methods of test - Method 204.1: Fineness of grind

• <u>AS/NZS 1580.205.1:1997</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.205.1:1997 (R2013) Paints and related materials - Methods of test - Method 205.1: Application properties - Brushing

• <u>AS/NZS 1580.205.2:1997</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.205.2:1997 (R2013) Paints and related materials - Methods of test - Method 205.2: Application properties - Conventional spraying

• <u>AS/NZS 1580.205.3:1997</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.205.3:1997 (R2013) Paints and related materials - Methods of test - Method 205.3: Application properties - Roller coating

• <u>AS/NZS 1580.205.4:1998</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.205.4:1998 (R2013) Paints and related materials - Methods of test - Method 205.4: Application properties - Airless spraying

• <u>AS/NZS 1580.211.1:1995</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.211.1:1995 (R2013) Paints and related materials - Methods of test - Method 211.1: Degree of settling

• <u>AS/NZS 1580.211.2:1995</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.211.2:1995 (R2013) Paints and related materials - Methods of test - Method 211.2: Ease of manual re-incorporation

• <u>AS/NZS 1580.213.1:1997 (R2013)</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.213.1:1997 (R2013) Paints and related materials - Methods of test - Method 213.1: Relative dry hiding power

#### <u>AS/NZS 1580.214.0:1996 (R2013)</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.214.0:1996 (R2013) Paints and related materials - Methods of test - Method 214.0: Rheological properties - Guide to test methods

• <u>AS/NZS 1580.457.1:1996</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.457.1:1996 (R2013) Methods of test for paints and related materials - Resistance to natural weathering

<u>AS/NZS 1580.481.1.10:1998 (Reconfirmed in 2013)</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.481.1.10:1998 (R2013) Methods of test for paints and related materials - Exposed to weathering - Degree of flaking and peeling

• AS/NZS 1580.481.1.11:1998 (Reconfirmed in 2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.481.1.11:1998 (R2013) Methods of test for paints and related materials - Exposed to weathering - Degree of chalking

• AS/NZS 1580.481.1.12:1998 (R2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.481.1.12:1998 (R2013) Paints and related materials - Methods of test Coatings - Method 481.1.12: Exposed to weathering - Degree of colour change

• AS/NZS 1580.481.1.2:1998 (R2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.481.1.2:1998 (R2013) Paints and related materials - Methods of test Coatings - Method 481.1.2: Exposed to weathering - Discolouration (including bronzing)

• AS/NZS 1580.481.1.7:1998 (Reconfirmed in 2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.481.1.7:1998 (R2013) Methods of test for paints and related materials - Exposed to weathering - Degree of checking

• AS/NZS 1580.481.1.8:1998 (Reconfirmed in 2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.481.1.8:1998 (R2013) Methods of test for paints and related materials - Exposed to weathering - Degree of cracking

• AS/NZS 1580.481.1.9:1998 (Reconfirmed in 2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.481.1.9:1998 (R2013) Methods of test for paints and related materials - Exposed to weathering - Degree of blistering

• <u>AS/NZS 1580.601.1:1995</u>

AS 3730.9-2006 (R2016) cites AS/NZS 1580.601.1:1995 (R2013) Methods of test for paints and related materials - Colour - Visual comparison

• AS/NZS 1580.602.2:1995 (R2013)

AS 3730.9-2006 (R2016) cites AS/NZS 1580.602.2:1995 (R2013) Paints and related materials - Methods of test - -Measurement of specular gloss of non-metallic paint films at 20 degrees, 60 degrees and 85 degrees

• <u>AS/NZS 2310:2002</u>

AS 3730.9-2006 (R2016) cites AS/NZS 2310:2002 (R2016) Glossary of paint and painting terms

• AS/NZS 2311:2000

AS 3730.9-2006 (R2016) cites AS/NZS 2311:2000 Guide to the painting of buildings

#### Australian Standards

• <u>AS 1580.213.2-2004</u>

AS 3730.9-2006 (R2016) cites AS 1580.213.2-2004 Paints and related materials - Methods of test - Method 213.2: Dry hiding power - Contrast ratio

• <u>AS 1580.301.2-1990</u>

AS 3730.9-2006 (R2016) cites AS 1580.301.2-1990 (R2013) Paints and related materials - Methods of test - Method 301.2: Non-volatile content by volume (volume solids)

## • AS 1580.401.6-2002 (R2013)

AS 3730.9-2006 (R2016) cites AS 1580.401.6-2002 (R2013) Paints and related materials - Methods of test - Hard dry condition (mechanical thumb test)

## • <u>AS 1580.409.1-2002 (R2013)</u>

AS 3730.9-2006 (R2016) cites AS 1580.409.1-2002 (R2013) Paints and related materials - Methods of test - Resistance to mudcracking

#### • AS 1580.409.2-2002 (R2013)

AS 3730.9-2006 (R2016) cites AS 1580.409.2-2002 (R2013) Paints and related materials - Methods of test - Low temperature coalescence

• AS 2700-1996

AS 3730.9-2006 (R2016) cites AS 2700-1996 Colour Standards for general purposes

• AS 3730.18-2006 (R2016)

AS 3730.9-2006 (R2016) cites AS 3730.18-2006 (R2016) Guide to the properties of paints for buildings - Part 18: Undercoat/sealer - Latex - Interior/exterior

Other


## • The Poisons Standard (the SUSMP)

AS 3730.9-2006 (R2016) cites The Poisons Standard (Standard for the Uniform Scheduling of Medicines and Poisons - SUSMP)

Back

Close

#### Table of Contents

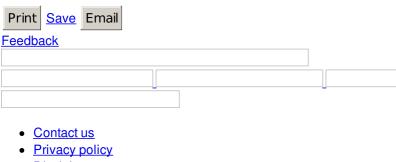

- Disclaimer
- Copyright



**Feedback**